



REVISIONS		
REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2


Installation instruction

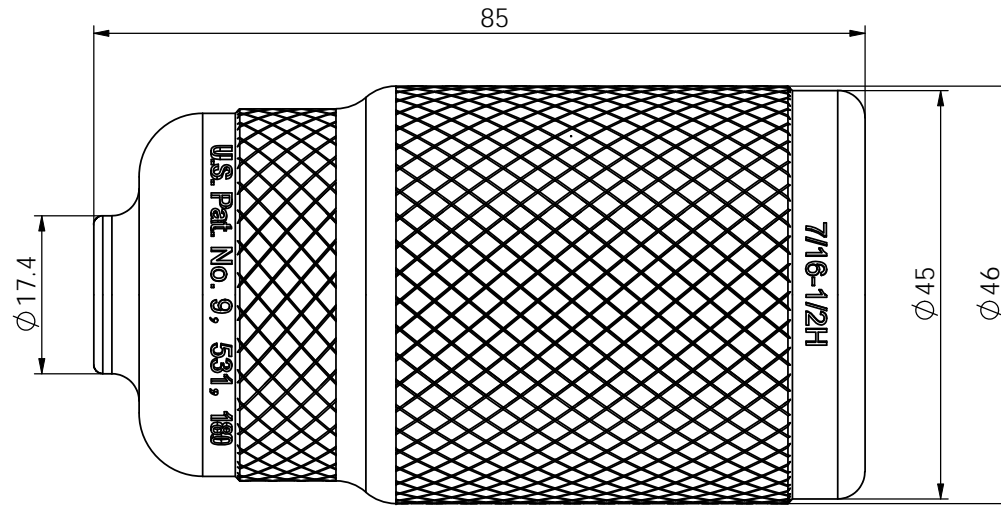

1. UV resistant (1120W/960 h)
2. Life: 10 years
3. Working temperature: -55°C~+155°C
4. Acid alkali resistant
5. Waterproofing standard IP68
6. This boot can be installed **before** and **after** cable jumper assembly.
- * Optional accessory: with guide AFJ89-4, this boot can be installed **after** cable jumper assembly.



receptacle (female)
connector requirement



optional accessory

DRAWN	TITLE			Amphenol AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA		
CHECKED	WPS boot, 7/16 male for 1/2" superflex cable					
APPROVED	SHEET	SCALE	METRIC	PART NO.		
	1/1	1.5/1	mm	AF2040450		
				AFS-2040450		
				1 1		