



REVISIONS

REV	DESCRIPTION	DATE
3	Add note 6	2020.1.2


Installation instruction

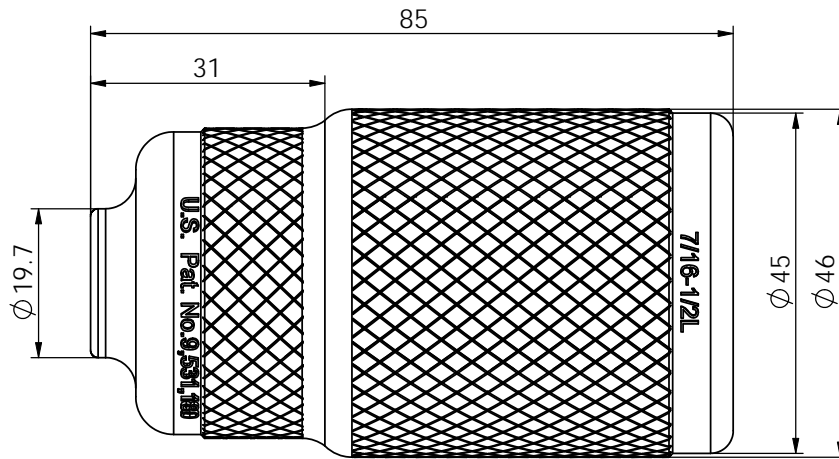

1. UV resistant (1120W/960 h)
  2. Life: 10 years
  3. Working temperature: -55°C~+155°C
  4. Acid alkali resistant
  5. Waterproofing standard IP68
  6. This boot can be installed **before** and **after** cable jumper assembly.
- \* Optional accessory: with guide AFJ89-4, this boot can be installed **after** cable jumper assembly.



receptacle (female)  
connector requirement

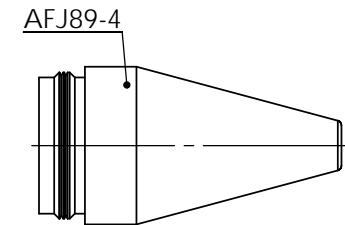

optional accessory

DRAWN		TITLE			<b>Amphenol</b> AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA		
CHECKED		WPS boot, 7/16 male for 1/2" annular cable					
APPROVED		SHEET	SCALE	METRIC	PART NO.		
		1/1	1/1	mm	AF2040451		
					AFS-2040451		