
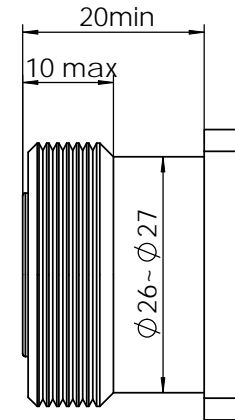


REVISIONS

REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2

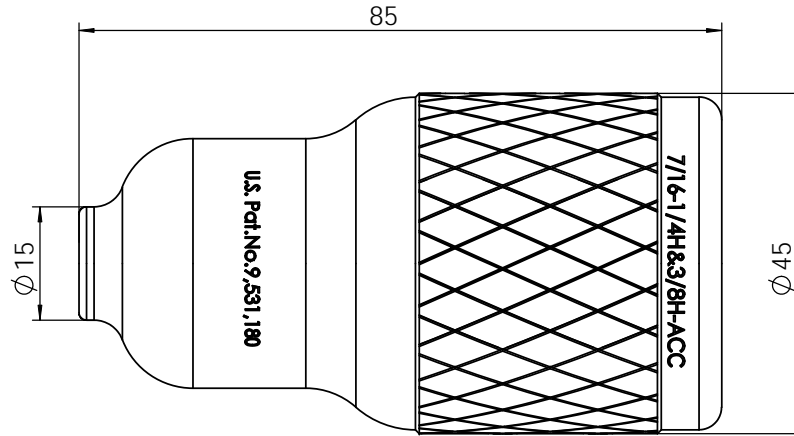

receptacle(female)
connector requirement

1. UV resistant (1120W/960 h)
2. Life: 10 years
3. Working temperature: -55 °C~+155 °C
4. Acid alkali resistant
5. Waterproofing standard IP68
6. This boot needs to be installed **before** cable jumper assembly.

DRAWN	TITLE			<h2 style="text-align: center;">Amphenol</h2> <small>AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA</small>		
CHECKED	WPS boot, 7/16 male for 1/4" superflex and 3/8" superflex cable					
APPROVED	SHEET	SCALE	METRIC	PART NO.		
	1/1	1.5/1	mm	AF2040530		
				AFS-2040530		
				1	1	1